

NEUMEIER

A current list of our dealers is available on our website.



DEALER CONTACT INFORMATION



Specifications are subject to modification, and this brochure may not represent the most current specifications. The images in this brochure may not depict the present market configuration. Kindly reach out to your dealer to verify specifications and configurations. All rights to this brochure are reserved by NEUMEIER GmbH. Please review the operating instructions prior to using NEUMEIER machines.

Miniloaders

NH25 NH35

NH40 NH60



Stand: 12/2024



NEUMEIER GmbH Böhmerstraße 10
93437 Furth im Wald



+49 9973 / 8466-0
+49 9973 / 8466-20



www.neumeier-gmbh.com
info@neumeier-gmbh.com

NEUMEIER

Construction machinery offering an unparalleled price-performance ratio.

WHY CHOOSE A NEUMEIER MINI LOADER?

1. OPTIMAL POWER COUPLED WITH OPTIMAL EFFICIENCY

THE ROBUST FARM LOADERS CAN TACKLE ANY CHALLENGE YOU ENCOUNTER, WHETHER IN HORTICULTURE OR AGRICULTURE.

3. VALUE AT A REASONABLE COST

THE PREMIUM COMPONENTS UTILIZED IN OUR MINI LOADERS GUARANTEE THAT THE MACHINE MAINTAINS ITS PERFORMANCE FOR THE TASKS IT WAS DESIGNED FOR, EVEN UNDER INCREASED OPERATIONAL HOURS.

2 ONE MACHINE - NUMEROUS POSSIBILITIES

OUR MINI LOADERS PROVIDE OPTIMAL FLEXIBILITY FOR YOUR SPECIFIC APPLICATIONS. WHETHER YOU REQUIRE PALLET FORKS, SWEEPERS, ASPHALT MILLING MACHINES, OR 4-IN-1 BUCKETS, CUSTOMIZE YOUR FARM LOADER TO SUIT THE TASKS YOU INTEND TO PERFORM.

4. EFFICIENCY AND COST EFFICIENCY

RAPID WORK CYCLES, ECONOMICAL CONSUMPTION, AND STRAIGHTFORWARD MAINTENANCE ARE ESSENTIAL CRITERIA THAT OUR MACHINES FULFILL TO ENSURE OPTIMAL EFFICIENCY.

OPTIONAL ACCESSORIES

- EURO-HITCH
- BROAD TIRES
- STREET-LEGAL
- FOLDING PROTECTIVE
- CANOPY
- RETRIEVE BUCKET
- 4-IN-1 SPADE
- GPS-SYSTEM
- MULCHER
- V-SNOW SHIELD
- BROOM
- EVALUATION CONTAINER

STANDARD APPARATUS

- HYDRAULIC QUICK CONNECTOR
- TWO SUPPLEMENTARY HYDRAULIC CONNECTIONS
- 100% DIFFERENTIAL LOCK WITH SWITCHABLE FUNCTIONALITY (WITH NH25 AS OPTION)
- LED TASK LIGHTS
- CONTINUOUSLY VARIABLE HYDROSTATIC ALL-WHEEL DRIVE SYSTEM
- HTF (HIGH TRACTION FORCE) DISC BRAKE
- RAPID GEAR AT 20 KM/H
- CONCURRENT ALIGNMENT OF PALLET FORKS

NH35

25,7 PS
2380 KG



NH60

61 PS
3100 KG



NH25

25,7 PS
2049 KG



NH40

47 PS
2950 KG




TECHNICAL SPECIFICATIONS

Motor	Unit	NH25	NH35
manufacturer	-	Perkins 403J-11	Perkins 403J-17
maximum engine power	kW	18,9	18,9
maximum engine power	PS	25,7	25,7
at maximum speed	U/min	2800	2800
displacement	L	1,1	1,7
WEIGHT	UNIT		
operating weight FSD / Cabin	kg	2049	2380
breakaway force (as defined by ISO 14397-2)	And	3870	3920
bucket capacity	m³	0,3	0,3-0,48
tipping load bucket (in accordance with ISO 14397-EN474-3) Horizontal mast - Straight machine	kg	1171	1500
tipping load bucket (in accordance with ISO 14397-EN474-3) Horizontal mast - Articulated machine	kg	907	1125
tipping load for pallet forks (in accordance with ISO EN474-3) Horizontal mast - Straight machine	kg	940	1216
tipping load for pallet fork (in accordance with ISO EN474-3) Horizontal mast - Articulated machine	kg	728	912
cab of the driver	-	protective canopy	Canopy / Compartment
velocity of travel	km/h	12	20
fuel tank capacity	L	23	35
hydraulic oil reservoir capacity	L	23	28
HYDRAULIC SYSTEM	UNIT		
hydraulic system operating pressure	Bar	305	350
working hydraulic flow rate	L/min	30	47
operational hydraulic working pressure	bar	205	205
DRIVE	UNIT		
drive type / propulsion		hydrostatic drive per axle	hydrostatic through a cardan shaft
tires / broad tires		27x8-5-15 / 26x12.00-12	27x10-5-15 / 31x15.5x15
NOISE LEVELS	UNIT		
average sound power level LwA	db (a)	99,7	101
guaranteed sound power level LwA	db (a)	101	101
Specified sound pressure level LpA	db (a)	85	86

NH40	NH60	NH60H
Yanmar 4TNV88	Perkins 404D-22T	Perkins 404D-22T
34,3	45	45
47	61	61
2400	2800	2800
2,2	2,2	2,2
WEIGHT		
2950	3100	3100
4120	4260	4450
0,3-0,48	0,3-0,48	0,3-0,48
2000	2100	2604
1500	1600	1984
1415	1515	1848
1061	1161	1400
cabin	cabin	cabin
20	20	20
59	59	59
34	49	34
450	450	450
47	56	47
205	205	205
hydrostatic through a cardan shaft	hydrostatic through a cardan shaft	hydrostatic through a cardan shaft
27x10,5-15 / 31x15,5x15	31x15.5x15 425-55 R17	31x15.5x15 425-55 R 17
95	95	94
101	101	101
86	86	86

		NH25	NH35	NH40	NH60	NH60H
A	wheelbase	1578	1571	1733	1733	1733
B	blade tip at axle center	388	510	730	730	510
C	tail swing	1064	1069	1196	1271	1271
D	length excluding shovel	3016	3253	3915	3995	3775
E	length with shovel	3867	4110	4767	4847	4627
F	seat elevation	1186	1240	1360	1360	1360
G	excavation depth	145	66	37	37	95
H	height with cabin.	2230	2350	2291	2291	2291
J	discharge elevation	2030	2147	2548	2548	1567
K	height of the horizontal blade	1833	2611	3059	3059	2113
L	bucket pivot point (max. lifting height)	2811	2888	3264	3264	2390
M	maximum operating height	2850	3672	4036	4036	3174
N	discharge spectrum	299	510	441	441	283
O	approach angle	45°	45°	45°	45°	38°
P	poultry establishment	40°	40°	40°	40°	48°
Q	tilt angle at maximum height	52°	52°	52°	52°	43°
R	track width	714	820	1000	1000	1000
S	overall width / broad tires	930 / 1090	1080 / 1350	1332 / 1400	1400	1400
T	ground clearance	208	202	252	252	252
U	inner turning radius	865	1106	965	965	965
V	external turning radius	1829	2206	2344	2344	2344
W	turning radius with the bucket	2210	2625	2679	2679	2679
Y	articulation angle	54°	45°	53°	53°	53°
X	inclination angle	24,8	28,8°	27°	27°	27°
H2	height of the folded protective roof	-	1839	1832	1832	1832
Z	Folded overhang protective roof	-	324	200	200	200
Z2	Pedenwinkel	12°	12°	8°	8°	8°

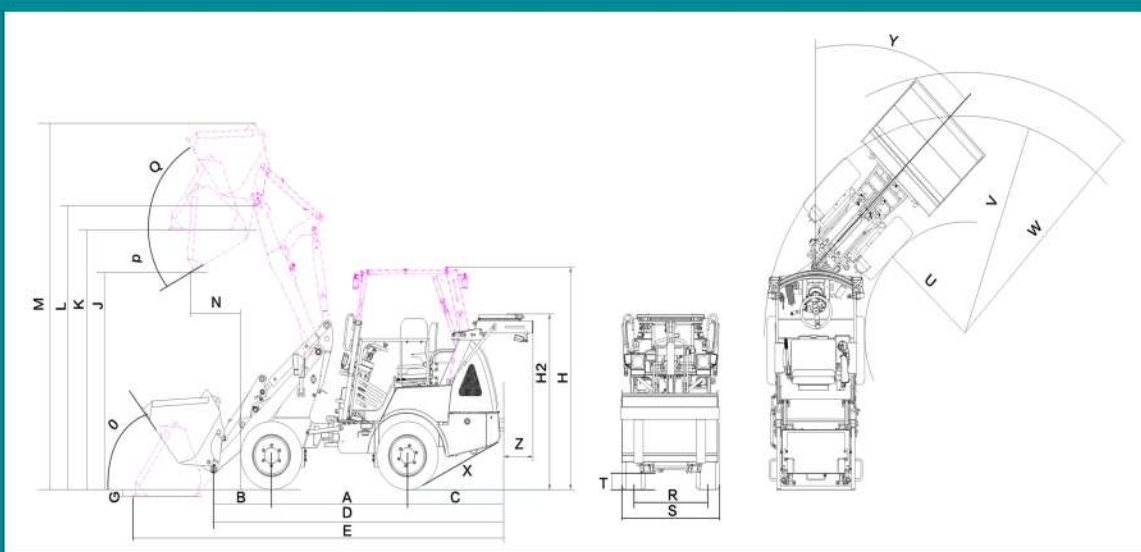

GLOBAL DISTRIBUTION AND SUPPLY OF SPARE PARTS



Thanks to NEUMEIER GmbH's strategic location in Europe, the delivery of spare parts and machinery is seamless and can be accomplished in a remarkably short timeframe. Deliveries within Germany are executed via overnight express, while shipments to other European countries are completed within 1-2 days, and international deliveries are facilitated through air freight.

ASSURED AVAILABILITY OF SPARE PARTS AND DELIVERY

From its headquarters in Furth im Wald, NEUMEIER GmbH facilitates the seamless shipment of spare parts throughout Germany within a 24-hour timeframe.

Machines can be acquired from designated NEUMEIER products can be obtained through authorized dealers or directly from us within approximately 1-2 weeks. A selection of accessories and attachments is frequently available in stock, enabling you to outfit your machine in the shortest possible timeframe.



GLOBAL DISTRIBUTORS:

Our products are not only available globally but are also backed by a network of committed dealers. These partners are equipped not only to sell our products but also to offer local support and comprehensive services.

Regardless of whether you reside in a bustling metropolis or in more secluded regions, our dealers are equipped to assist you with inquiries, installations, maintenance, or repairs. Their dedication to excellence and expertise renders them invaluable partners for your requirements.



Local assistance, accessible everywhere

Wherever you may be, you can depend on the assistance and service provided by our dealers.