


THE BENEFITS OF A NEUMEIER HYDRAULICBREAKER

- **HIGH-IMPACT POWER** – OPTIMAL PERFORMANCE WITH MINIMAL ENERGY CONSUMPTION.
- **STURDY CONSTRUCTION** – RESILIENT AND RESISTANT FOR DEMANDING APPLICATIONS
- **MINIMAL MAINTENANCE** – DECREASED WEAR AND TEAR, LOWER OPERATING EXPENSES
- **EFFICIENT DAMPING SYSTEM** – REDUCED VIBRATION, ENHANCED COMFORT FOR THE OPERATOR.
- **EFFORTLESS INSTALLATION AND MANAGEMENT** – STREAMLINED DESIGN FOR VERSATILE APPLICATION
- **RELIABILITY** – ROBUST PERFORMANCE IN EXTREME CONDITIONS
- **UNIVERSAL COMPATIBILITY** – COMPATIBLE WITH A RANGE OF CARRIER DEVICES

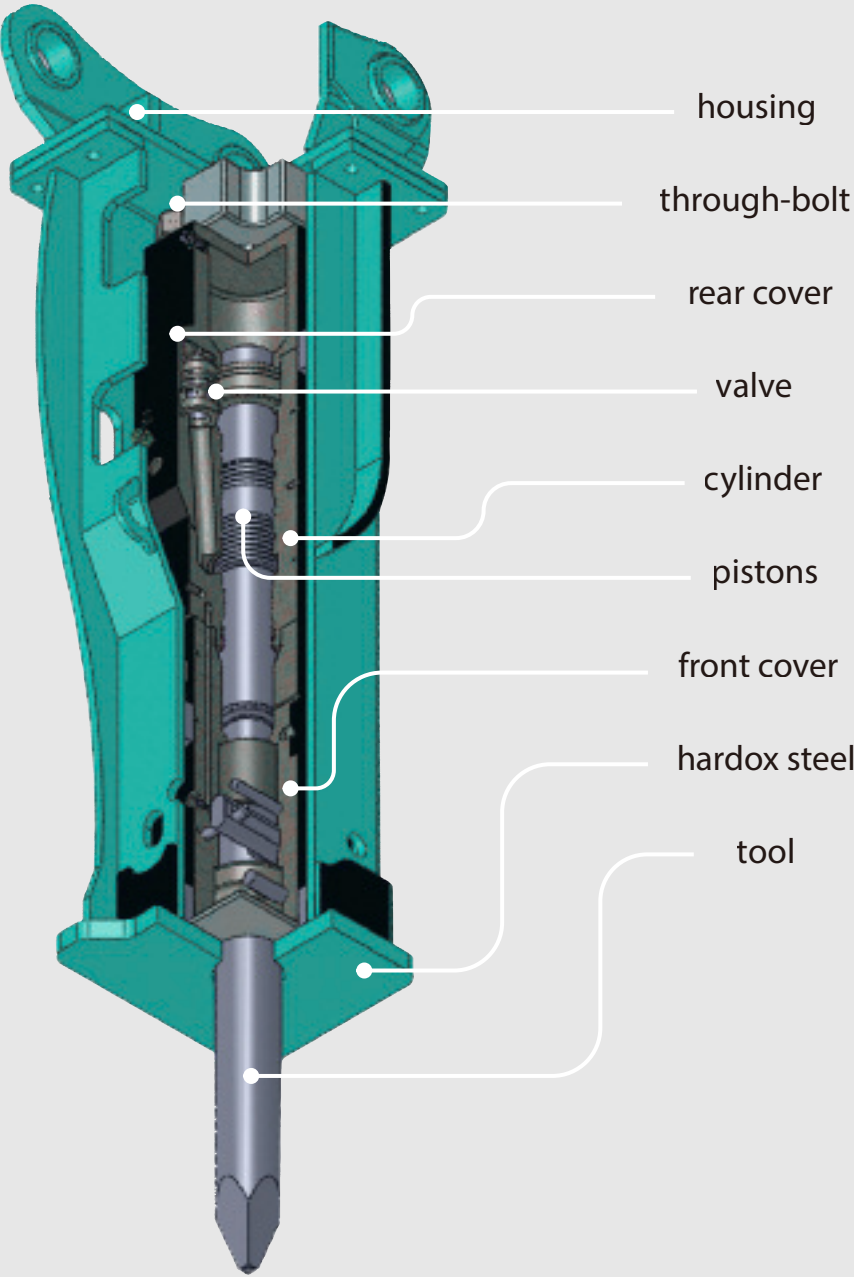

HYDRAULICBREAKER

model	operating weight (kg)	length in milli meters	oil flow (l/min)	operating pressure (Bar)	chisel diameter (mm)	beat count BPM	impact force joules	hose connection inch	excavator weight in tons.
NB10	72	1135	15-25	90-120	40	800-1400	203	1/2	0.8-2.5
NB20S	126	1262	20-30	90-120	45	700-1200	290	1/2	1.2-3.0
NB30S	152	1342	25-50	90-120	53	600-1100	320	1/2	2.5-4.5
NB35S	224	1472	30-60	100-130	60	500-1000	550	1/2	3-5.5
NB40S	295	1600	40-70	110-140	68	500-900	690	1/2	4.0-7.0
NB43S	375	1860	50-90	120-150	75	400-800	900	1/2	6.0-9.0
NB50S	861	2326	80-110	150-170	100	350-700	2100	3/4	11-16
NB60S	1296	2604	90-120	150-170	125	350-650	2900	1	15-18
NB81AS	1825	2828	120-180	160-180	140	350-500	4200	1	18-26
NB100S	2071	3055	150-210	160-180	150	300-450	5200	1	25-30
NB121S	2635	3255	180-240	160-180	155	300-450	6500	1 1/4	28-35
NB130S	2850	3395	200-260	160-180	155	250-400	9000	1 1/4	30-40
NB151S	3990	3709	210-290	160-180	175	200-350	12000	1 1/4	40-55
NB40BL	270	1347	40-70	110-140	68	500-900	690	1/2	4.0-7.0
NB550	5200	1600	220-270	180-210	185	200-300	16500	1 1/4	46-65
NB750	6500	1700	220-290	180-210	195	200-250	18500	1 1/4	65-85
NB1000	8500	1700	290-350	190-210	210	180-200	22000	1 1/4	75-100



Stand: 12/2024

NEUMEIER GmbH Böhmerstraße 10
93437 Furth im Wald

+49 9973 / 8466-0
+49 9973 / 8466-20

www.neumeier-gmbh.com
info@neumeier-gmbh.com

NEUMEIER

Construction machinery offering an unparalleled price-performance ratio.