COMPACT TRACK LOADER N315T

5,440 kg · 81.8 kW · 0.75 m³

Powerful compact track loader with 81.8 kW Kubota engine meeting EU Stage V, 1,500 kg rated operating capacity and rubber track undercarriage for low ground pressure and maximum traction on soft and uneven ground.

EU STAGE V

Kubota engine



5,440 kg	81.8 kW	1,500 kg	0.75 m³	3,270 mm	150 L/min
Operating weight	Kubota, EU Stage V	Rated capacity	Bucket capacity	Hinge pin height	High-flow hydraulics

PRODUCT FEATURES


- Powerful Kubota engine meeting EU Stage V / EPA Tier 4F – economical and environmentally friendly
- Low centre of gravity and tracked undercarriage for high stability on any terrain
- Continuous frame construction for high strength and stability
- Two travel speeds – agile and manoeuvrable even in the tightest spaces
- Cab with 3D protective grille, sound and heat insulation for fatigue-free work
- Precise controls and braking system for efficient, accurate work
- Universal quick coupler with hydraulic quick couplings – fits attachments from most manufacturers
- Service-friendly design – low downtime and maintenance costs


OPTIONAL EQUIPMENT

- ☐ Earth auger
- ☐ Angle broom
- ☐ Pallet forks
- ☐ Snow blower
- ☐ 4-in-1 bucket
- ☐ Backhoe attachment
- ☐ Sweeper with hopper
- ☐ Tree spade
- ☐ Snow blade
- ☐ Reversing camera

Illustration may show optional equipment. Subject to technical changes and errors. Preliminary data sheet, as of 10/2026.

DIMENSIONS

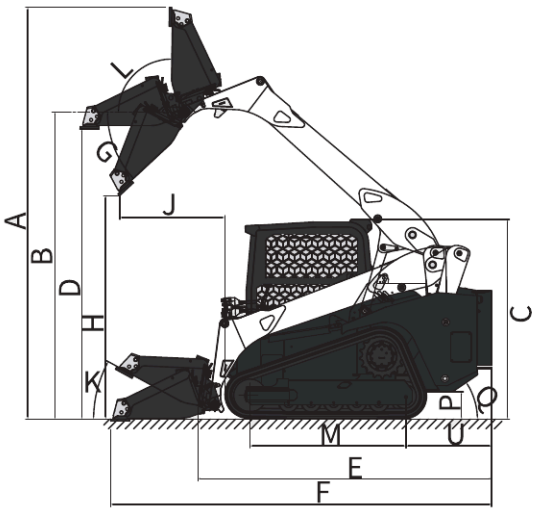

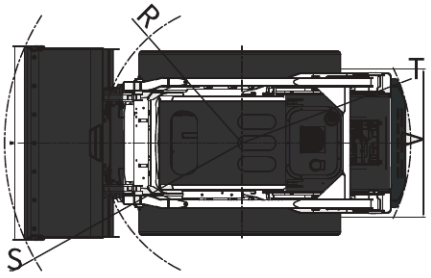

A	Max. working height	4,400 mm
B	Hinge pin height	3,270 mm
C	Height over cab	2,150 mm
D	Max. height with bucket level	3,125 mm
E	Length without attachment	3,145 mm
F	Length with standard bucket	4,100 mm
H	Dump height	2,440 mm
J	Dump reach	1,225 mm
M	Undercarriage wheelbase	1,680 mm
P	Ground clearance	290 mm

R	Turning radius front, without attachment	1,700 mm
S	Turning radius front, with bucket	2,715 mm
T	Turning radius rear	1,800 mm
U	Rear overhang	919 mm
V	Track gauge (track centres)	1,515 mm
W	Bucket width	2,100 mm
G	Dump angle at max. height	43°
K	Rollback angle at ground	33°
L	Rollback angle at max. height	90°
Q	Rear departure angle	32°

TECHNICAL DATA

GENERAL	
Operating weight	5,440 kg
Rated operating capacity	1,500 kg
Bucket capacity	0.75 m³
Tipping load	35 kN
Breakout force	24 kN
Tractive force	42 kN
L × W × H	4,100 × 2,100 × 2,150 mm

ENGINE	
Make / model	Kubota V3800-TIE5
Rated power	81.8 kW / 2,400 rpm
Displacement	3.769 L
Bore × stroke	100 × 120 mm
Specific fuel consumption	223 g/kWh
Emission standard	EU Stage V / EPA Tier 4F

HYDRAULICS	
Controls	Hydraulic pilot control
Flow rate, standard	15–150 L/min
Flow rate, high-flow	150 L/min
Operating pressure, standard	25 MPa (250 bar)
Loader hydraulics pressure	25 MPa (250 bar)

TRAVEL DRIVE	
Travel speed (2 speeds)	9.5 / 18 km/h
Undercarriage	Rubber tracks

ELECTRICAL	
System voltage	12 V
Battery	120 Ah

CAPACITIES	
Cooling system	12 L
Engine oil	10 L
Fuel tank	100 L
Hydraulic tank	38 L

All information without guarantee. Subject to technical changes and errors. Preliminary data sheet, as of 10/2026.